

Work Tool Attachments

PRODUCT LINE



Americas North



Skid Steer, Multi Terrain & Compact Track Loaders

216B3 242B3 252B3 262C2 277C2 289C2
 226B3 246C 257B3 272D 279C2 299D
 236B3 247B3 259B3 272D XHP 287C2 299D XHP



Augers



	Model	Drive Shaft Torque @ Max Pressure		Drive Method
		Nm	(lbf ft)	
A14B	All	2304	(1700)	Direct
A19B	All	4122	(3042)	Planetary
A26B	C & D Series Models/226B3 /242B3/257B3/259B3	6826	(5034)	Double Planetary

Backhoes





	Model	Bucket Breakout Force		Dig Depth	
		kg	(lb)	mm	(in)
BH150	All Except 236B3/252B3	3241	(7146)	3074	(121)
BH160	C & D Series Models/236B3/252B3	3241	(7146)	3074	(121)

Blades



	Model	Width		Height	
		mm	(in)	mm	(in)
Angle	All	1829/2134	(72/84)	614	(24)
Dozer	All	2002/2342	(79/92)	619	(24)

Brooms



	Model	Sweeping Width		Brush Diameter	
		mm	(in)	mm	(in)
Angle	BA18 All	2134	(84)	813	(32)
Pick Up	BP15B All	1524	(60)	660	(26)
	BP18B C & D Series Models/236B3/252B3 /257B3/259B3	1829	(72)	660	(26)
Utility	BU115 All	1510	(59)	660	(26)
	BU118 C & D Series Models/236B3/252B3 /257B3/259B3	1865	(73)	660	(26)

Brushcutters



	Model	Working Width		Tip Speed fpm	Max Cutting Diameter	
		mm	(in)		mm	(in)
BR160	216B3/226B3/247B3	1524	(60)	13080-18360	431	(950)
BR166	All	1676	(66)	10270-14420	476	(1050)
BR172	All	1829	(72)	11210-15730	499	(1100)
BR272	226B3	1829	(72)	14940-19660	508	(1120)
BR378	C & D Series Models	1981	(78)	11130-19030	535	(1180)

Buckets



	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
Dirt	All	1372-1981	(54-78)	0.3-0.44	(0.39-0.57)
General Purpose	All	1524-2134	(60-84)	0.36-0.63	(0.47-0.82)
Light Material	All	1829-2438	(72-96)	0.69-0.93	(0.9-1.22)
Multi-Purpose	All	1524-2134	(60-84)	0.3-0.43	(0.39-0.56)
Utility	All	1524-1829	(60-72)	0.43-0.52	(0.56-0.67)
	Model	Width Range		Jaw Opening	
		mm	(in)	mm	(in)
Industrial Grapple	All	1524-1981	(60-78)	1016	(40)
Utility Grapple	All	1676/1829	(66/72)	902	(35.5)

Cold Planers



	Model	Drum Width		Number of Bits (conical)
		mm	(in)	
PC104B	All	350	(14)	42
PC205B	All	450	(18)	48
PC306B	C & D Series/226B3/242B3/257B3/259B3	600	(24)	60
PC310B	C & D Series/257B3/259B3	1000	(40)	78
PC408B	272D XHP, 299D XHP	750	(30)	60
PC412B	272D XHP, 299D XHP	1200	(47)	90

BEFORE YOUR PURCHASE...

Contact your local Cat® dealer or visit www.cat.com > Products > Work Tool Attachments.

Continued →



Click or scan above
to visit www.cat.com

Skid Steer, Multi Terrain & Compact Track Loaders continued

216B3 242B3 252B3 262C2 277C2 289C2
 226B3 246C 257B3 272D 279C2 299D
 236B3 247B3 259B3 272D XHP 287C2 299D XHP








Forks		Tine Length		Fork Tine Width	
	Model	mm	(in)	mm	(in)
Pallet	All	910-1220	(36-48)	100	(4)
	Model	Width		Exposed Fork Tine Length	
		mm	(in)	mm	(in)
Utility	All	1676/1829	(66/72)	627	(24.7)
Utility Grapple	All	1676/1829	(66/72)	627	(24.7)
Industrial Grapple	All	1676/1829	(66/72)	559	(22)

	Hammers		Operating Weight		Blow Rate		Tool Diameter	
	Model		kg	(lb)	blows/min		mm	(in)
	H55Ds	All	250	(550)	1022-2300		56	(2.20)
	H65Ds	All	371	(818)	700-2000		65	(2.56)

	Material Handling Arms		Width w/side step		Load Length (end point)	
	Model		mm	(in)	mm	(in)
	Fixed Length	All	1309	(52)	768	(30)



	Mulchers		Working Width		Max Cutting Diameter	
	Model		mm	(in)	mm	(in)
	HM315B	C & D Series Models	1465	(58)	200	(8)
	HM415B	272D/272D XHP/299D/299D XHP	1465	(58)	200	(8)

	Rakes		Jaw Opening		Width		
		Model	mm	(in)	mm	(in)	
	Industrial Grapple Rake	All	940	(37)	1829/2134	(72/84)	
		Model	Working Width		Bucket Capacity		
			mm	(in)	m³	(yd³)	
	Landscape Rakes	LR15B	All	1576	(62)	0.3	(0.39)
		LR18B	236B3/247B3-299D XHP	1883	(74)	0.34	(0.44)
		Model	Drum Width		Max Angling (right or left)		
			mm	(in)	degrees		
	Power Box Rakes	PR172	All	1829	(72)	20	
		PR184	All	2134	(84)	20	
		PR190	All	2286	(90)	20	

	Snow Blowers		Intake Width		Throw Distance	
	Model		mm	(in)	m	(ft)
	SR117	216B3/226B3/247B3	1702	(67)	9.1	(30)
	SR118	C & D Series Models/236B3/252B3/257B3/259B3	1854	(73)	12.2	(40)
	SR121	C & D Series Models/236B3/252B3/257B3/259B3	2159	(85)	12.2	(40)
	SR318	C & D Series Models/226B3/257B3/259B3	1854	(73)	13.7	(45)
	SR321	C & D Series Models/226B3 /257B3/259B3	2159	(85)	13.7	(45)

	Snow Push		Moldboard Sections		Intake Width		Coupler Interface	
	Model				mm	(in)		
	8 ft – Standard	All	3		2299	(91)	SSL	
	10 ft – Standard	236B3/242B3/252B3-299D XHP	4		3061	(121)	SSL	
	12 ft – Standard	262C2-299D XHP	5		3823	(151)	SSL	
	14 ft – Standard	D Series	6		4585	(181)	SSL	

Continued →

Skid Steer, Multi Terrain & Compact Track Loaders continued

216B3 242B3 252B3 262C2 277C2 289C2
226B3 246C 257B3 272D 279C2 299D
236B3 247B3 259B3 272D XHP 287C2 299D XHP



Stump Grinders



	Model	Width		Length	
		mm	(in)	mm	(in)
SG16B	All	1175	(46)	1737	(69)
SG18B	226B3/242B3/257B3-299D XHP	1175	(46)	1737	(69)

Shears



	Model	Force at Throat		Jaw Opening	
		kN	(Sh Ton)	mm	(in)
S305	236B3-299D	1812	(204)	240	(9.4)

Tillers




	Model	Width		Working Depth	
		mm	(in)	mm	(in)
LT13B	All	1321	(52)	25-152	(1-6)
LT18B	236B3/247B3-299D XHP	1847	(73)	25-152	(1-6)

Trenchers



	Model	Overall Width		Working Depth	
		mm	(in)	mm	(in)
T6B	All	1426	(56)	914	(36)
T9B	All	1901	(75)	1219	(48)
T15B	226B3/242B3/257B3-299D XHP	1901	(75)	1524	(60)

Vibratory Drum Compactors



	Model	Drum Width		Dynamic Force	
		mm	(in)	kg	(lb)
CV16B	All	1676	(66)	5399	(11903)
CV18B	C & D Series Models/252B3	1854	(73)	5399	(11903)

Vibratory Plate Compactors



	Model	Impulse Force		Cycles/min	Base Plate Width	
		kN	lbf		mm	(in)
CVP16	All*	16	(3650)	2200	305	(12)

* Only for use with the BH150/BH160 Backhoe attachment.

Wheel Saw



	Model	Wheel Width		Number of Bits
		mm	(in)	
SW345B	C & D Series Models/226B3/242B3/257B3/259B3	80	(3)	64
SW360B	C & D Series Models/226B3/242B3/257B3/259B3	80/160/200	(3/6/8)	64
SW380B	C & D Series Models/226B3/242B3/257B3/259B3	250	(10)	64
SW460B	C & D Series Models/226B3/242B3/257B3/259B3	80/160/200	(3/6/8)	64
SW480B	C & D Series Models/226B3/242B3/257B3/259B3	250	(10)	64



Excavators (Mini)

300.9D 301.7D 302.7D CR 304E CR 305.5E CR
301.4C 302.4D 303.5E CR 305E CR 308E CR SB



Augers



	Model	Drive Shaft Torque @ Max Pressure		Drive Method
		Nm	(lbf ft)	
A7B	301.4C-302.7D CR	1105	(815)	Direct Drive
A14B	302.4D-304E CR	2304	(1700)	Direct Drive
A19B	303.5E CR-305.5E CR	4120	(3040)	Single Planetary
A26B	305E CR-308E CR SB	6830	(5040)	Double Planetary

Buckets



	Model	Width Range		Capacity Range	
		mm	(in)	m ³	(yd ³)
Digging	300.9D-302.7D	230-711	(9-28)	0.014-0.092	(0.018-0.12)
Ditch Cleaning	All	700-1600	(27.6-63)	0.027-0.42	(0.035-0.55)
Ditch Cleaning Tilt	302.7D-305.5E CR	1092-1600	(43-63)	0.11-0.28	(0.14-0.36)
Heavy Duty	303.5E CR-308E CR SB	300-914	(12-36)	0.05-0.39	(0.06-0.51)
Heavy Duty Capacity	304E CR-305.5E CR SB	300-914	(12-36)	0.08-0.30	(0.10-0.39)
Heavy Duty Rock	308E CR SB	610-762	(24-30)	0.23-0.31	(0.30-0.40)

Couplers

	Model	Weight	
		kg	(lb)
Dual Lock	303.5E CR-308E CR SB	38-93	(83-206)
Dedicated	308E CR SB	159	(350)
Pin Grabber	301.4C-302.7D	13-24	(29-53)
Pin Lock	308E CR SB	80	(176)



Click or scan above to see H75Es Hammers in action!

Grapples



	Model	Jaw Opening		Weight	
		mm	(in)	kg	(lb)
Contractors'	G107B 308E CR SB	1765	(70)	360	(794)

Hammers



	Model	Operating Weight		Blow Rate blows/min	Tool Diameter	
		kg	(lb)		mm	(in)
H25D	300.9D	70	(154)	1000-1900	36	(1.42)
H35Ds	301.4C, 301.7D	103	(227)	800-2900	40	(1.57)
H45Ds	301.4C-302.7D CR	145	(320)	900-2500	48	(1.89)
H55Ds	302.7D CR-305.5E CR	250	(550)*	1022-2300	56	(2.20)
H65Ds	303.5E CR-305.5E CR	371	(818)*	700-2000	65	(2.56)
H75Es	308E CR SB	500	(1103)*	840-1650	74.5	(2.93)
H95Es	308E CR SB	730	(1610)*	700-1260	87.5	(3.44)

*Maximum



Click or scan above to see H95Es Hammers in action!

Shears



	Model	Force at Throat		Jaw Opening	
		kN	(Sh Ton)	mm	(in)
S305	303.5E CR-308E CR SB	1812	(204)	240	(9)

Thumbs

	Model	Rotation Angle	
		Degrees	
Hydraulic	All	120-206	

Vibratory Plate Compactors



	Model	Impulse Force		Cycles/min	Base Plate Width	
		kN	(lbf)		mm	(in)
CVP16	303.5E CR-305.5E CR	16	(3650)	2200	305	(12)
CVP40	308E CR SB	40	(8928)	2200	584	(23)




BEYOND YOUR PURCHASE...

Support plans are available for your machine extending all the way out to the attachment to help protect your investment.

Excavators

311D RR	316E	320E RR	328D CR	349E
312E	318E	321D LCR	329E	374D
314E CR	320E	324E	336E	390D

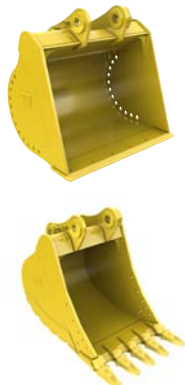

Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
Ditch Cleaning	311D-336E	1200-1800	(48-72)	0.57-1.91	(0.75-2.50)
Ditch Cleaning Tilt	311D-329E	1500/1800	(60/72)	0.57-1.14	(0.75-1.50)
Extreme Duty	336E-374D	1250-1900	(49-75)	1.60-3.80	(2.09-5.00)
General Duty	All	458-1900	(18-75)	0.25-4.60	(0.33-6.00)
General Duty High Capacity	349E-390D	2000	(79)	3.82-5.30	(5.00-7.00)
General Duty Pin Grabber Performance	316E	600/900	(24/36)	0.33/0.57	(0.43/0.75)
General Duty Wide Tip	311D-349E	458-1950	(18-78)	0.27-3.41	(0.35-4.46)
Heavy Duty	319D/320E-349E/374D	600-1900	(24-75)	0.44-3.80	(0.57-5.00)
Heavy Duty Pin Grabber Performance	320E-349E	600-1850	(24-74)	0.44-2.56	(0.57-3.34)
Heavy Duty Power	320E-336E	900-1500	(36-60)	0.79-1.86	(1.03-2.43)
Severe Duty	311D-316E/320E-390D	600-1900	(24-75)	0.30-4.60	(0.39-6.00)
Severe Duty Pin Grabber Performance	316E	1050/1200	(42/48)	0.70/0.83	(0.92/1.09)
Severe Duty Power	324E-336E	600-1350	(24-54)	0.51-1.50	(0.66-1.97)



Couplers

	Model	Weight	
		kg	(lb)
Center Lock™ Pin Grabber	All	224-1227	(494-2706)
Dedicated	All	177-1402	(390-3090)
Pin Lock	311D RR-316E/320E-321D LCR	240-399	(530-880)



Click or scan above to see the Center-Lock Coupler in action!



Grapples

Grapples			Jaw Opening		Weight	
		Model	mm	(in)	kg	(lb)
Contractors'	G112B	311D RR-314E	2195	(86.4)	857	(1885)
	G115B	316E/318E	2555	(100.6)	1286	(2830)
	G120B	320E-329E	2687	(105.8)	1523	(3350)
	G125B	320E-329E	3128	(123.1)	1932	(4250)
	G130B	320E-336E	3223	(126.9)	2332	(5130)
	G145B	349E	3433	(135.2)	3050	(6724)
	G165B	374D	3860	(152.0)	4055	(8,940)
	G185B	390D	4076	(160.5)	4800	(10582)
			Jaw Opening		Weight	
		Model	mm	(in)	kg	(lb)
Demolition & Sorting	G310B	311D RR-316E	375	(0.49)	1800	(70.87)
	G315B	318E-321D LCR	550	(0.72)	2000	(78.74)
	G320B	321D LCR-329E	750	(0.98)	2200	(86.61)
	G325B	324E-336E	850	(1.11)	2200	(86.61)
	G330	329E-349E	1000	(1.31)	2270	(89.40)
				Capacity		Jaw Opening
			m³	(yd³)	mm	(in)
Trash	TG-312	311D RR-314E	1.70	(2.20)	2210	(87)
	TG-315	316E/318E	1.83	(2.40)	2210	(87)
	TG-B	320E-321D LCR	2.70	(3.60)	2540	(100)
	TG-CB	324E-329E	3.80	(5.00)	3129	(123)
	TG-DB	336E	4.6/5.5	(6.0/7.3)	3086/3470	(122/137)
	TG-TB	349E	5.04-8.17	(6.58-10.69)	3161-3800	(124-150)



Click or scan above to see Demolition & Sorting Grapples in action!

Continued —



Excavators continued

311D RR	316E	320E RR	328D CR	349E
312E	318E	321D LCR	329E	374D
314E CR	320E	324E	336E	390D




Hammers

	Model	Operating Weight*		Blow Rate blows/min	Tool Diameter	
		kg	(lb)		mm	(in)
H95Es	311D RR/312E	600-730	(1323-1610)	700-1260	87.5	(3.44)
H110Es	311D RR-316E	950-1080	(2095-2381)	450-1000	99.5	(3.92)
H115Es	312E-320E RR	1070-1460	(2359-3219)	370-800	109.5	(4.31)
H120Es	316E-329E	1480-1860	(3263-4101)	350-620	119.5	(4.70)
H130Es	320E-329E	1750-2140	(3859-4719)	320-600	129.5	(5.10)
H140Es	324E-336E	2410-2660	(5314-5865)	325-540	139.5	(5.49)
H160Es	336E/349E	3230-3530	(7122-7784)	400-505	155.5	(6.12)
H180Es	349E/374D	3990-4340	(8798-9570)	275-450	174.5	(6.87)

* Dependent on mounting bracket and tool choice.



Click or scan
above to see
E Series Hammers
in action!

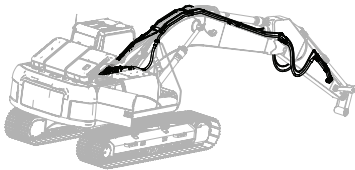

Hydraulic Solutions

	Model
Field-Installed Hydraulic Kits	All

Multi-Processors

	Model	Jaw Set	Force at Primary Blade		Jaw Opening	
			kN	(Sh Ton)	mm	(in)
MP15	318E-324E	Concrete Cutter	2200	(247)	670	(26.6)
		Concrete Crusher	2100	(236)	710	(28.0)
	320E-324E	Primary Pulverizer	2100	(236)	700	(27.6)
		Secondary Pulverizer	2200	(247)	730	(28.7)
		Shear	2100	(236)	390	(15.4)
MP20	324E-336E	Concrete Cutter	3000	(337)	820	(32.3)
		Concrete Crusher	2900	(326)	850	(33.5)
		Primary Pulverizer	2750	(309)	800	(31.5)
		Secondary Pulverizer	3000	(337)	890	(35.0)
		Shear	2900	(326)	420	(16.5)
		Tank Shear	2200	(247)	440	(17.3)
		Concrete Cutter	4100	(460)	975	(38.4)
MP30	336E/349E	Concrete Crusher	3800	(427)	1050	(41.3)
		Primary Pulverizer	3950	(444)	960	(37.8)
		Secondary Pulverizer	4800	(539)	1100	(43.3)
		Shear	3750	(421)	470	(18.5)
		Tank Shear	4000	(449)	510	(20.1)
MP40	374D/390D	Concrete Cutter	4400	(494)	1280	(50.4)
		Concrete Crusher	4650	(523)	1320	(52.0)
		Secondary Pulverizer	5500	(618)	1400	(55.1)
		Shear	4750	(534)	630	(24.8)



Continued →



Excavators continued

311D RR	316E	320E RR	328D CR	349E
312E	318E	321D LCR	329E	374D
314E CR	320E	324E	336E	390D



Rakes

	Model	Raking Width		Teeth	Tooth Spacing	
		mm	(in)		mm	(in)
Excavator	320E-336E	838-1651	(33/49/65)	3/4/5	400	(16)



Rippers

	Model	Shank Length		Weight Range	
		mm	(in)	kg	(lb)
Excavator	316E-390D	992-1801	(39-71)	330-2196	(728-4841)



Secondary Pulverizers

	Model	Crushing force at tip		Jaw Depth		Jaw Opening	
		t	(st)	mm	(in)	mm	(in)
P215	316E-324E	119	(131)	722	(28)	838	(33)
P225	324E-336E	174	(192)	899	(35)	1018	(40)
P235	336E/349E	190	(209)	1103	(43)	1214	(48)



Click or scan above to see
Secondary Pulverizers
in action!



Click or scan above for animation
of Shear with Bolt-on
Piercing Tip!



Click or scan above to see
Pro Series Thumbs
in action!



Shears

	Model	Mount	Force at Throat		Jaw Opening	
			kN	(Sh Ton)	mm	(in)
S320B	311D RR-318E	Boom	3706	(417)	409	(16)
	318E-336E	Stick	3706	(417)	409	(16)
S325B	318E-321D LCR	Boom	5562	(625)	528	(21)
	324E-336E	Stick	5562	(625)	528	(21)
S340B	324E-336E	Boom	6818	(766)	563	(22)
	349E/374D	Stick	6818	(766)	563	(22)
S365C	336E/349E	Boom	10342	(1162)	845	(33)
	374D/390D	Stick	10342	(1162)	845	(33)
S385C	349E/374D	Boom	12509	(1405)	879	(35)
	390D	Stick	12509	(1405)	879	(35)



Thumbs

	Model	Width (Range)		Weight (Range)	
		mm	(in)	kg	(lb)
Pro Series Hydraulic	311D RR-329E	522-1332	(20.6-52.4)	300-1004	(661-2214)
Utility Hydraulic	311D RR-329E	320-612	(12.6-24.1)	320-473	(705-1043)
Stiff Link	311D RR-349E	401-900	(15.8-35.4)	236-873	(520-1919)



Click or scan
above to see
Utility Thumbs
in action!



Click or scan
above to see
Stiff Link Thumbs
in action!



Vibratory Plate Compactors

	Model	Impulse Force		Cycles/min	Base Plate Width	
		kN	(lbf)		mm	(in)
CVP75	311D RR-318E	74	16508	2200	737	(29)
CVP110	320E RR-336E	110	(24669)	2200	864	(34)

Continued →

Excavators (Material Handler)

M318D MH
M322D MH
M325D MH

330D MH
345C MH





Grapples		Industry Capacity Class		Operating Weight		Max. Lift Capacity	
	Model	L	(yd³)	kg	(lb)	kg	(lb)
Orange Peel*	GSH15B	M318D MH-M322D MH	600	(0.75)	1215/1450	(2679/3197)	4000 (8818)
	GSH20B	M318D MH-M325D MH, 330D MH	600	(0.75)	1575	(3472)	8000 (17637)
		M322D MH-M325D MH, 330D MH	800	(1.00)	1615/1920	(3660/4232)	8000 (17637)
		M322D MH-M325D MH, 330D MH	1000	(1.25)	1660/1975	(3660/4354)	8000 (17637)
	GSH22B	345C MH	1200/1500	(1.50/2.00)	2390/2410	(5269/5313)	12000 (26455)

*4- and 5-tine grapple models available



Click or scan above to see Orange Peel Grapples in action!



BEYOND YOUR PURCHASE...

Your Cat dealer can assist with financing options and discuss day-to-day operating costs for your fleet and job requirements.

Excavators (Wheeled)

M313D M315D M316D M318D M322D M325D



Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m ³	(yd ³)
General Duty	M313D-M322D	600-1400	(24-55)	0.39-1.43	(0.50-1.87)
Heavy Duty	M318D	900-1200	(26-48)	0.68-0.98	(0.88-1.29)
Ditch Cleaning	M313D-M322D	1500/1800	(60/72)	0.80-1.24	(1.23-1.63)
Ditch Cleaning Tilt	M313D-M316D/M322D	1500/1800	(60/72)	0.70-0.96	(0.87-1.25)



Couplers

	Model	Weight	
		kg	(lb)
Center Lock™ Pin Grabber	M313D-M322D	224-378	(494-833)
Pin Lock	M313D-M320D	288-399	(635-880)



Grapples

	Model	Jaw Opening		Weight	
		mm	(in)	kg	(lb)
Contractors'	G115B M313D-M316D	2555	(100.6)	1286	(2830)
	G120B M318D/M322D	2687	(105.8)	1523	(3350)
	G125B M322D	3128	(123.1)	1932	(4250)
Demolition & Sorting	Model	Capacity		Width (open)	
		L	(yd ³)	mm	(in)
		m ³	(yd ³)	mm	(in)
Demolition & Sorting	G310B M313D-M316D	375	(0.49)	1800	(70.87)
	G315B M315D-M322D	550	(0.72)	2000	(78.74)
Trash	Model	Capacity		Jaw Opening	
		m ³	(yd ³)	mm	(in)
		m ³	(yd ³)	mm	(in)
Trash	TG-315 M313D-M316D	1.83	(2.40)	907	(2000)
	TG-B M318D/M322D	2.7	(3.60)	1288	(2840)



Click or scan above to see Demolition & Sorting Grapples in action!

Continued →

BEYOND YOUR PURCHASE...

Partner with your Cat dealer to help evaluate repair, rebuild or replacement costs and make the best choices for your business future.

Excavators (Wheeled)

M313D M315D M316D M318D M322D M325D



Hammers

	Model	Operating Weight kg (lb)	Blow Rate blows/min	Tool Diameter mm (in)
H110Es	M313D-M316D	950-1080 (2095-2381)	450-1000	99.5 (3.92)
H115Es	M313D-M322D	1070-1460 (2359-3219)	370-800	109.5 (4.31)
H120Es	M315D-M322D	1480-1860 (3263-4101)	350-620	119.5 (4.70)
H130Es	M318D-M322D	1750-2140 (3859-4719)	320-600	129.5 (5.10)



Click or scan
above to see
E Series Hammers
in action!



Rippers

	Model	Shank Length mm (in)	Weight Range kg (lb)
Excavator	M315D-M322D	992/1084 (39/43)	330-456 (728-1006)



Secondary Pulverizers

	Model	Crushing force at tip t (st)	Jaw Depth mm (in)	Jaw Opening mm (in)
P215	M315D-M322D	119 (131)	722 (28)	838 (33)



Click or scan
above to see
Secondary Pulverizers
in action!



Shears

	Model	Mount	Force at Throat kN (Sh Ton)	Jaw Opening mm (in)
S320B	M315D-M322D	Stick	3706 (417)	409 (16)
	M313D-M315D	Boom	3706 (417)	409 (16)
S325B	M313D-M318E	Boom	5562 (625)	528 (21)
S340B	M316D-M322D	Boom	6818 (766)	563 (22)



Thumbs

	Model	Width (Range) mm (in)	Weight (Range) kg (lb)
Stiff Link	M313D-M318D	401-679 (15.8-26.7)	236-305 (520-672)
	M322D	460-732 (18.1-28.8)	426-499 (940-1099)



Click or scan
above to see
Stiff Link Thumbs
in action!



Vibratory Plate Compactors

	Model	Impulse Force kN lbf	Cycles/min	Base Plate Width mm (in)
CVP75	M313D-M318D	74 (16508)	2200	737 (29)
CVP110	M322D	110 (24669)	2200	864 (34)

Backhoe Loaders

416F 420F 430F 450F



Augers

	Model	Drive Shaft Torque @ Max Pressure		Drive Method
		Nm	(lbf ft)	
A26B Pin-on	416F-430F	5711	(4212)	Double Planetary



Blades

	Model	Width		Height	
		mm	(in)	mm	(in)
Angle	All	2819	(111)	1041	(41)



Brooms

	Model	Sweeping Width		Brush Diameter	
		mm	(in)	mm	(in)
Angle	BA25	All	2500 (98)	700	(28)
Pickup Broom	BP25	All	2500 (98)	700	(28)
Special Application	2.5	All	2500 (98)	915	(36)

Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
Loader (Front)	General Purpose	All	2262-2434 (89-96)	0.76-1.5	(1.0-2.0)
	Multi-Purpose	All	2262-2434 (89-96)	1.0-1.2	(1.3-1.5)
	Side Dump	420F-450F	2514-2765 (99-109)	0.76-0.96	(1.0-1.25)
Hoe (Rear)	Coral	416F-430F	305-762 (12-30)	0.06-0.19	(0.08-0.25)
	Ditch Cleaning	All	1219-1524 (48-60)	0.37-0.57	(0.48-0.74)
	Heavy Duty	All	305-914 (12-36)	0.08-0.44	(0.1-0.57)
	Heavy Duty Rock	416F-430F	305-914 (12-36)	0.07-0.33	(0.09-0.43)
	Soil Excavation	416F-430F	457-914 (18-36)	0.18-0.38	(0.23-0.5)
	Standard Duty	416F-430F	305-914 (12-36)	0.08-0.29	(0.1-0.38)
	High Capacity	416F-430F	305-914 (12-36)	0.13-0.46	(0.17-0.60)

Cold Planers

	Model	Drum Width		Number of Bits (conical)
		mm	(in)	
PC404	416F-430F	450	(18)	48

Couplers

	Model		Weight	
			kg	(lb)
Loader	IT	All	117-227	(390-500)
Hoe	Dual Lock	416F-430F	87	(195)
	Pin Lock	416F-430F	80-109	(176-240)
	Pin Puller	All	95-118	(210-260)



Cutters

	Model	Cut Wheel Diameter		Weight	
		mm	(in)	kg	(lb)
Mechanical Asphalt	All	470	(19)	193	(425)



Forks

	Model	Tine Length		Tine Width	
		mm	(in)	mm	(in)
Fold Over	All	1067	(42)	80	(3.2)
Pallet	All	1067-1372	(42-54)	127	(5.0)



BEYOND YOUR PURCHASE...

As with all Cat equipment, you can expect complete care and service all through the life of your new Work Tool attachment.

Continued →

Backhoe Loaders continued

416F 420F 430F 450F



Hammers

	Model	Operating Weight		Blow Rate	Tool Diameter	
		kg	(lb)	blows/min	mm	(in)
H65Ds Flat-Top	416F-430F	371	(818)*	700-2000	65	(2.56)
H75Es	416F-430F	500	(1013)*	840-1650	74.5	(2.93)
H95Es	416F-450F	730	(1610)*	700-1260	87.5	(3.44)
H110Es	450F	1080	(2381)*	450-1000	99.5	(3.92)

* Maximum



Click or scan above to see H75Es Hammers in action!



Click or scan above to see H95Es Hammers in action!



Material Handling Arms

	Model	Retracted Length		Extended Length	
		mm	(in)	mm	(in)
Extendible	All	2007	(79)	3937	(155)



Plows

	Model	Cutting Width		Height	
		mm	(in)	mm	(in)
Reversible, Trip Edge	All	3099-3708	(122-146)	940-1143	(37-45)



Rakes

	Model	Raking Width		Tooth Spacing	
		mm	(in)	mm	(in)
Loader	All	2108	(83)	330	(13)



Rippers

	Model	Shank Length		Weight Range	
		mm	(in)	kg	(lb)
Hoe	All	696-744	(27-29)	160-199	(353-438)



Snow Push



	Model	Moldboard Sections	Intake Width		Coupler Interface
			mm	(in)	
10 ft – Standard	420F/430F	4	3061	(121)	IT
12 ft – Standard	420F/430F	5	3823	(151)	IT
14 ft – Standard	420F/430F	6	4858	(181)	IT
12 ft – Industrial	430F	4	3286	(129)	IT

Thumbs

	Model	Rotation Angle
		degrees
Hydraulic	All	105
Stiff Link	416F-430F	90



Vibratory Plate Compactors

	Model	Impulse Force		Cycles/min	Base Plate Width	
		kN	(lbf)		mm	(in)
CVP40	All	40	(8928)	2200	584	(23)



Forest Machines

320D FM 324D FM 325D FM 568 FM



Forestry Grapples

	Model	Jaw Opening		Weight	
		mm	(in)	kg	(lb)
Log Loading Grapples	GLL52B All	1321	(52)	1252	(2760)
	GLL55B All	1397	(55)	1298	(2861)
	GLL60B All	1524	(60)	1345	(2964)



Harvester Heads

	Model	Weight		Max. Dia. Cut	Std. Feed Speed		Std. Feed Force	
		kg	(lb)	mm (in)	m/sec	(ft/sec)	kN	(lb-f)
	HH44 DE	320D FM/324D FM	1542 (3400)	650 (25.5)	5.7	(18.8)	22.6	(5076)
	PE-44	320D FM/324D FM	1378 (3038)	640 (25.6)	5.0	(16.5)	23.0	(5170)
	SATCO 214	320D FM	1190 (2618)	635 (25.0)	4.8	(15.7)	21.0	(4721)
	SATCO 318	320D FM/324D FM	1900 (4190)	735 (29.0)	5.8	(19.0)	30.0	(6745)
	SATCO 318GP	320D FM/324D FM	2100 (4630)	690 (27.2)	4.8	(15.7)	40.0	(9000)
	SATCO 322	320D FM/324D FM	2175 (4795)	735 (29.0)	4.8	(15.7)	40.0	(9000)
	SATCO 22" DEBARKER	324D FM/325D FM	2200 (4900)	635 (25.0)	5.8	(19.0)	28.0	(6295)
	SATCO 223	324D FM/325D FM	3000 (6615)	760 (30.0)	4.8	(15.7)	45.0	(10120)
	SATCO 424	325D FM/568 FM	3400 (7480)	800 (31.5)	3.7	(12.2)	55.0	(12365)
	SATCO 325	325D FM/568 FM	3700 (8160)	800 (31.5)	4.6	(15.2)	48.0	(10790)



Directional Felling Heads

	Model	Weight		Max. Cut	Jaw Opening	
		kg	(lb)	mm (in)	mm	(in)
	SATCO 420	320D FM /324D FM /325D FM	1450 (3100)	635 (25.0)	965	(38)
	SATCO 630	324D FM/325D FM	2000 (4400)	914 (36.0)	1397	(55)



Slashers

	Model	Throat Opening		Weight	
		mm	(in)	kg	(lb)
	107	320D FM	1070 (42.1)	907	(2000)



Track Feller Bunchers

521B 522B 541 2 552 2



Harvester Heads

	Model	Weight		Max. Dia. Cut	Std. Feed Speed		Std. Feed Force	
		kg	(lb)	mm (in)	m/sec	(ft/sec)	kN	(lb-f)
	HH44 DE	521B /522B	1542 (3400)	650 (25.5)	5.7	(18.8)	22.6	(5076)
	PE-44	521B /522B	1378 (3038)	640 (25.6)	5.0	(16.5)	23.0	(5170)
	SATCO 214	521B /522B	1190 (2618)	635 (25.0)	4.8	(15.7)	21.0	(4721)
	SATCO 318	521B /522B /541 II	1900 (4190)	735 (29.0)	5.8	(19.0)	30.0	(6745)
	SATCO 318GP	521B /522B /541 II	2100 (4630)	690 (27.2)	4.8	(15.7)	40.0	(9000)
	SATCO 322	521B /522B /541 II	2175 (4795)	735 (29.0)	4.8	(15.7)	40.0	(9000)
	SATCO 22" DEBARKER	521B /522B /541 II	2200 (4900)	635 (25.0)	5.8	(19.0)	28.0	(6295)
	SATCO 223	521B /522B /541 II	3000 (6615)	760 (30.0)	4.8	(15.7)	45.0	(10120)
	SATCO 424	541 II /552 II	3400 (7480)	800 (31.5)	3.7	(12.2)	55.0	(12365)
	SATCO 325	541 II /552 II	3700 (8160)	800 (31.5)	4.6	(15.2)	48.0	(10790)



Directional Felling Heads

	Model	Weight		Max. Cut	Jaw Opening	
		kg	(lb)	mm (in)	mm	(in)
	SATCO 420	521B /522B	1450 (3100)	635 (25.0)	965	(38)
	SATCO 630	521B /522B /541 II /552 II	2000 (4400)	914 (36.0)	1397	(55)



Felling Heads

	Model	Weight (Partial Tilt)	Max. Cut
		kg (lb)	mm (in)
	HF201B	All	3200 (7054)
	HF221	All	3783 (8340)

Wheel Feller Bunchers

553C 563C 573C



Felling Heads

	Model	Single Cut Cap.		Accumulation Area		Weight	
		cm	(in)	m ²	(ft ²)	kg	(lb)
SH-56B	All	56.0	(22.0)	0.69	(7.4)	3122	(6886)
SC-57	All	57.6	(22.7)	0.47	(5.1)	3220	(7100)
SS-56	All	56.0	(22.0)	0.37	(4.0)	2973	(6554)

Track Harvesters

501HD



Harvester Heads

	Model	Weight		Max. Dia. Cut	Std. Feed Speed	Std. Feed Force	
		kg	(lb)			kN	(lb-f)
PE-44	501HD	1378	(3038)	640 (25.6)	5.0 (16.5)	23.0	(5170)
PF-48	501HD	2100	(4630)	610 (24.0)	4.3 (14.1)	33.4	(7509)
SATCO 214	501HD	1190	(2618)	635 (25.0)	4.8 (15.7)	21.0	(4721)
SATCO 318	501HD	1900	(4190)	735 (29.0)	5.8 (19.0)	30.0	(6745)



Directional Felling Heads

	Model	Weight		Max. Cut		Jaw Opening	
		kg	(lb)	mm	(in)	mm	(in)
SATCO 420	501HD	1450	(3100)	635	(25.0)	965	(38)

Knuckleboom Loaders

519 529 559B 569 579



Delimbers

	Model	Throat Opening	Weight
		mm (in)	kg (lb)
320	529-579	787.4 (31)	3039 (6700)
426	529-579	873.1 (34.4)	3402 (7500)



Forestry Grapples

	Model	Jaw Opening		Weight	
		mm	(in)	kg	(lb)
Light Duty Log	4042SN-R18	519	1079.5 (42.5)	347.0	(765)
Medium Duty Log	4042SN-R25	519-529	1079.5 (42.5)	421.8	(930)
	4045TW-R25	519-529	1143 (45)	567.0	(1250)
Heavy Duty Log	4045TW-R50	529-579	1143 (45)	664.5	(1465)
	5055TW-R50	559B-579	1397 (55)	809.7	(1785)
	4548SN-R50	559B-579	1219.2 (48)	630.5	(1390)
	C742W-R50	559B-579	1066.8 (42)	641.8	(1415)
	C848W-R50	559B-579	1219.2 (48)	744.3	(1641)
Grapple Saw	GS-4548SN-R50	559B-579	1219.2 (48)	725.7	(1600)



Slashers

	Model	Throat Opening	Weight
		mm (in)	kg (lb)
107	All	1070 (42.1)	907 (2000)


Wheel Loaders (Compact)

906H2 907H2 908H2 914G2 IT14G2




Augers

	Model	Drive Shaft Torque @ Max Pressure		Drive Method
		Nm	(lbf ft)	
A14B	906H2-908H2	2304	(1700)	Direct
A19B	906H2-908H2	4118	(3040)	Planetary
A26B	908H2	6826	(5034)	Double Planetary



Blades

	Model	Width		Height	
		mm	(in)	mm	(in)
Angle	IT14G2	2667-3099	(105-122)	762-1041	(30-41)
Straight	IT14G2	2438	(96)	1321	(52)



Brooms

	Model	Sweeping Width		Brush Diameter	
		mm	(in)	mm	(in)
Angle	BA18	906H2-908H2	2134 (84)	813	(32)
	BA22	906H2-908H2	2200 (87)	700	(28)
	BA25	914G2/IT14G2	2500 (98)	700	(28)
Pick Up	BP22	906H2-908H2	2200 (87)	700	(28)
	BP25	914G2/IT14G2	2500 (98)	700	(28)
Special Application	2.5	914G2/IT14G2	2500 (98)	915	(36)
Utility	BU115	906H2-908H2	1510 (59)	660	(26)
	BU118	906H2-908H2	1865 (73)	660	(26)



Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
Coal	914G2	2819	(111)	2.5	(3.25)
Fertilizer	914G2	2159	(85)	1.8/2.2	(2.38/2.88)
General Purpose	All	1880-2413	(74-95)	0.8-1.5	(1.0-2.0)
Light Material	906H2-908H2	1940-2050	(76-81)	1.2-1.5	(1.6-2.0)
Material Handling	914G2/IT14G2	2184-2540	(86-111)	1.7-2.5	(2.25-3.25)
Multi-Purpose	All	1880-2413	(74-95)	0.8-1.6	(1.0-2.1)
Side Dump	914G2/IT14G2	2388-2743	(94-108)	1.0-1.5	(1.25-2.00)
Industrial Grapple	906H2-908H2	2080	(81)		
Woodchip	914G2/IT14G2	3099	(122)	3.4-3.8	(4.5-5.0)



Cold Planers

	Model	Drum Width		Number of Bits
		mm	(in)	(conical)
PC104B	906H2-908H2	350	(14)	42
PC205B	906H2-908H2	450	(18)	48
PC306B	906H2-908H2	600	(24)	60
PC310B	906H2-908H2	1000	(40)	78

Couplers

	Model	Weight	
		kg	(lb)
Horizontal Pin Lock	914G2	181	(400)

Cutters

Cutters	Model	Cut Wheel Diameter			
		mm	(in)	kg	(lb)
Mechanical Asphalt	IT14G2	470	(19)	193	(425)



Forks

	Model	Tine Length		Carriage Width	
		mm	(in)	mm	(in)
Log & Lumber	914G2/IT14G2	1219/1524	(48/60)	1829/2184	(72/86)
Log & Lumber w/top clamp	IT14G2	1219	(48)	1778	(70)
Pallet	All	1067-1829	(42-72)	1397	(55)

Material Handling Arms

	Model	Width w/side step		Load Length-end	
		mm	(in)	mm	(in)
Fixed Length	906H2-908H2	1320	(52)	768	(30)
	Model	Retracted Length		Extended Length	
		mm	(in)	mm	(in)
Extendible	914G2/IT14G2	2438/2007	(96/79)	4039/3937	(159/155)



Continued →

Wheel Loaders (Compact) continued

906H2 907H2 908H2 914G2 IT14G2



Plows

	Model	Cutting Width		Height	
		mm	(in)	mm	(in)
One-Way	IT14G2	2642	(104)	1702	(67)
Reversible	914G2/IT14G2	3658/3226	(144/127)	1270/1143	(50/45)
V-Plow	914G2/IT14G2	2642	(104)	2007	(79)



Rakes

	Model	Working Width		Bucket Capacity	
		mm	(in)	m³	(yd³)
Landscape Rakes					
LR15B	906H2-908H2	1576	(62)	0.3	(0.39)
LR18B	906H2-908H2	1883	(74)	0.34	(0.44)
Power Box Rakes					
	Model	Working Width			
		mm	(in)		
PR172	908H2	1829	(72)		
PR184	908H2	2134	(84)		
PR190	908H2	2286	(90)		



Snow Blowers

	Model	Intake Width		Throw Distance	
		mm	(in)	m	(ft)
SR118	906H2-908H2	1854	(73)	12.2	(40)
SR121	906H2-908H2	2159	(85)	12.2	(40)
SR318	906H2-908H2	1854	(73)	13.7	(45)
SR321	906H2-908H2	2159	(85)	13.7	(45)



Snow Push

	Model	Moldboard Sections	Intake Width	Coupler Interface
			mm (in)	
10 ft – Standard	906H2-908H2	4	3061 (121)	SSL
12 ft – Standard	906H2-908H2	5	3823 (151)	SSL
14 ft – Standard	906H2-908H2	6	4585 (181)	SSL
12 ft – Industrial	914G2/IT14G2	4	3286 (129)	IT
14 ft – Industrial	914G2/IT14G2	5	4096 (161)	IT



Stump Grinders

	Model	Width		Length	
		mm	(in)	mm	(in)
SG16B	906H2-908H2	1175	(46)	1737	(69)




Tillers

	Model	Working Width		Working Depth	
		mm	(in)	mm	(in)
LT13B	906H2-908H2	1321	(52)	25-152	(1-6)
LT18B	906H2-908H2	1854	(73)	25-152	(1-6)



Trenchers

	Model	Overall Width		Working Depth	
		mm	(in)	mm	(in)
T6B	906H2-908H2	1426	(56)	914	(36)
T9B	906H2-908H2	1901	(74.8)	1219	(48)
T15B	906H2-908H2	1901	(74.8)	1524	(60)



Vibratory Drum Compactors

	Model	Drum Width		Dynamic Force	
		mm	(in)	kg	(lb)
CV16B	906H2-908H2	1676	(66)	5399	(11903)
CV18B	906H2-908H2	1854	(73)	5399	(11903)



Wheel Saws

	Model	Wheel Width		Number of Bits
		mm	(in)	(conical)
SW345	906H2-908H2	80	3	64

Wheel Loaders (Small)

924K 930K 938K



Brooms

	Model		Sweeping Width		Brush Diameter	
			mm	(in)	mm	(in)
Angle	BA25	924K/930K	2500	(98)	700	(28)
	BA30	938K	3000	(118)	915	(36)
Pick Up Brooms	BP25	924K/930K	2500	(98)	700	(28)
Special Application	2.5	924K/930K	2500	(98)	915	(36)
	3.0	938K	3000	(118)	915	(36)



Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
General Purpose Performance Series	All	2550/2750	(100/108)	1.90-2.90	(2.50-3.80)
Grading	All	2700	(106)	1.80/1.90	(2.40/2.50)
Grapple	All	2697	(106)	2.50-2.90	(3.30-3.80)
High Dump	All	2550/2750	(100/108)	3.00-5.00	(4.00-6.50)
Light Material	All	2750	(108)	3.40-5.00	(4.40-6.50)
Multi-Purpose	All	2550	(100)	2.00/2.10	(2.60/2.70)
Sand & Gravel	930K/938K	2750	(108)	2.60-3.20	(3.40-4.10)
Side Dump	All	3105	(122)	1.70/1.90	(2.30/2.50)
Waste Handling	All	3059	(120)	3.40-4.00	(4.40-5.20)
Woodchip	All	3330	(131)	4.70-5.50	(6.10-7.20)



Couplers

	Model	Weight	
		kg	(lb)
Fusion™	All	252-392	(556-865)



Cutters

	Model	Cut Wheel Diameter		Weight
		mm	(in)	kg (lb)
Mechanical Asphalt	All	470	(19)	193 (425)



Forks

	Model	Tine Length		Carriage Width	
		mm	(in)	mm	(in)
Construction	All	1524/1829	(60/72)	2440	(96)
Log & Lumber	All	1219-1829	(48-72)	1839/2134	(72/84)
Millyard Pole	938K	1378	(54)	2211	(87)
Pallet	All	1220-1524	(48-60)	1566	(62)
Pipe & Pole	930K /938K	1829	(72)	2731	(108)



Material Handling Arms

	Model	Retracted Length		Extended Length	
		mm	(in)	mm	(in)
Extendible	All	2760	(109)	4137	(163)



Plows

	Model	Cutting Width		Height	
		mm	(in)	mm	(in)
Reversible	All	3696/4265	(146/168)	1034/1268	(41/50)



Rakes

	Model	Raking Width		Tooth Spacing	
		mm	(in)	Teeth	mm (in)
Loader	All	2495	(98)	8	349 (13.8)
Loader, w/Top Clamp	All	2146/2844	(85/112)	7/9	349 (13.8)



Snow Push

	Model	Moldboard Sections	Intake Width	Coupler Interface
			mm (in)	
12 ft – Industrial	All	4	3286 (129)	IT /Fusion
14 ft – Industrial	All	5	4096 (161)	IT /Fusion
16 ft – Industrial	All	6	4915 (194)	IT /Fusion
19 ft – Industrial	All	7	5753 (226)	IT /Fusion
22 ft – Industrial	All	8	6540 (257)	IT /Fusion


Wheel Loaders (Medium)

950K 962K 966K 972K 980K




Brooms

Brooms			Sweeping Width		Brush Diameter	
		Model	mm	(in)	mm	(in)
Angle	BA30	950K/962K	3000	(118)	915	(36)
Special Application	3.0	950K/962K	3000	(118)	915	(36)



Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
Coal Performace Series	966K-980K	3447/3638	(136/143)	6.90-8.20	(9.00-10.75)
General Purpose Performace Series	All	2894-3405	(114-134)	2.50-6.00	(3.25-7.85)
Grapple	950K-972K	3048/3059	(120)	3.60-4.60	(4.75-6.00)
Heavy Duty Rock	966K/972K	3251	(128)	3.40-4.00	(4.50-5.25)
Heavy Duty Quarry Rock	980K	3505/3568	(138/140)	4.00-4.60	(5.25-6.00)
High Dump	950K-972K	2910/3059	(115/120)	4.20-6.10	(5.50-8.00)
Material Handling Performace Series	All	2894-3405	(114-134)	2.50-5.70	(3.25-7.50)
Multi-Purpose	950K-972K	2943/3220	(116/127)	2.70-3.10	(3.50-4.00)
Rock Performance Series	All	2969-3495	(117-138)	2.70-4.40	(3.50-5.75)
Side Dump	950K-972K	3220/3677	(124/145)	2.70-3.60	(3.50-4.75)
Slag	972K/980K	3250/3394	(128/134)	3.40/3.80	(4.50/5.00)
Waste Handling	All	3059-3886	(120-153)	5.00-9.80	(6.50-12.75)
Woodchip	All	3327-4166	(131-164)	7.60-11.50	(10.00-15.00)



Click or scan above to see Performance Series Buckets in action!



Click or scan above to see the Fusion Coupler in action!



Couplers

	Model	Weight	
		kg	(lb)
Fusion	950K-972K	564/566	(1244/1248)



Forks

	Model	Tine Length		Carriage Width	
		mm	(in)	mm	(in)
Log & Lumber	950K-972K	1219-2438	(48-96)	2428/2502	(96/99)
Log & Lumber w/Top Clamp	950K/962K	1219	(48)	1923	(76)
Logging	All	1626/1829	(64/72)	2286-2743	(90-108)
Millyard	All	1372-1829	(54-72)	2235-2769	(88-109)
Millyard Pole	950K-972K	1677	(66)	2184	(86)
Pallet	All	1219-2438	(48-96)	2134-2845	(84-112)
Pipe & Pole	950K-972K	1829/2438	(72/96)	2743/3124	(108/123)
Unloading Grapple	950K/962K	762/917	(30/36)	1832/1850	(72/73)

Material Handling Arms



	Model	Retracted Length		Extended Length	
		mm	(in)	mm	(in)
Extendible	All	3061	(120)	4585	(180)



Plows

	Model	Cutting Width		Height	
		mm	(in)	mm	(in)
Reversible	All	4235-4953	(167-195)	1025-1287	(40-50)
V-	950K-972K	3069/3234	(120/126)	2070/2129	(82/84)



Rakes

	Model	Raking Width		Teeth	Tooth Spacing	
		mm	(in)		mm	(in)
Loader	950K-972K	2844/3156	(112/124)	9	349/387	(13.8/15.2)
Loader, w/Top Clamp	950K-972K	2844/3156	(112/124)	9	349/387	(13.8/15.2)



Wheel Loaders (Large)

988H 990H 992K 993K 994H



	Buckets		Width Range		Capacity Range	
	Model		mm	(in)	m³	(yd³)
	Coal	988H-994H	4115-6299	(162-248)	11.5-35.9	(15.0-47.0)
	General Purpose Performance Series	988H	3912	(154)	6.9/7.6	(9.0/10.0)
	Heavy Duty Rock Performance Series	988H/990H	4089/4670	(161/184)	6.3/8.6	(8.3/11.3)
	Heavy Duty Rock	990H/992K	4521/5080	(178/200)	8.6/10.7	(11.2/14.0)
	Heavy Duty Granite Performance Series	990H	4634	(182)	8.6	(11.3)
	Heavy Duty Granite	988H-993K	3988-5156	(157-203)	6.3-13.0	(8.3-17.0)
	High Abrasion	992K/993K	5080-5156	(200/203)	10.7-13.0	(14.0-17.0)
	Iron Ore	988H-993K	3937-5156	(155-203)	4.4-9.9	(5.8-13.0)
	Rock Performance Series	988H/990H	4013/4610	(158/182)	6.3-10.0	(8.3-13.0)
	Rock	988H-994H	3988-5639	(157-245)	7.6-19.1	(10.0-25.0)
	Serrated Edge	988H-993K	3962-6223	(156-200)	6.9-15.3	(9.0-20.0)
	Slag	988H-992K	3861-4496	(152-177)	5.4-9.2	(7.0-12.0)

	Couplers		Weight	
	Model		kg	(lb)
	Block Handling	988H	1440	(3175)

	Forks		Tine Length		Carriage Width	
	Model		mm	(in)	mm	(in)
	Block Handling	988H	1524-1753	(60/69)	2083	(82)
	Logging	988H	2489	(98)	2769	(109)
	Pallet	988H/992K	1829-2743	(72-108)	2794-3099	(110-122)

	Rakes		Raking Width		Reach	
	Model		mm	(in)	m	(ft)
	Block Handling	988H	851	(34)	7.8	(25.6)

Track Loaders

953D 963D 973D



	Blades		Width		Height	
	Model		mm	(in)	mm	(in)
	Straight Trim	All	3150-3480	(124-137)	839-1143	(35-45)


	Buckets		Width Range		Capacity Range	
	Model		mm	(in)	m³	(yd³)
	General Purpose	All	2362-2925	(93-115)	1.82-3.25	(2.38-4.25)
	Multi-Purpose	963D/973D	2438-3403	(100-134)	1.63-4.40	(2.13-5.75)
	Side Dump	963D/973D	2743/3429	(108/135)	1.91/2.29	(2.50/3.00)

	Couplers		Weight	
	Model		kg	(lb)
	Fusion	963D	641	(1413)
	Horizontal Pin Lock	All	313-490	(690-1080)

	Forks		Tine Length		Width Over Tine	
	Model		mm	(in)	mm	(in)
	Pallet	All	(1219-2438)	(48-96)	432-2337	(17-92)

	Material Handling Arms		Retracted Length		Extended Length	
	Model		mm	(in)	mm	(in)
	Extendible	All	2438	(96)	4648	(183)

	Rakes		Raking Width		Tooth Spacing	
	Model		mm	(in)	Teeth	mm (in)
	Loader	963D	2388	(94)	7	330 (13)

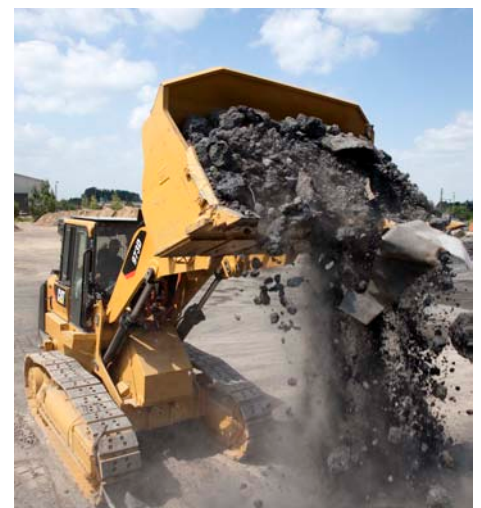

Telehandlers

TH255 TH406C TH407C TH514C TL642C TL943C TL1055C TL1255C



Bale Handler

	Model	Width		Capacity	
		mm	(in)	kg	(lb)
Bale Handler	TH406C/TH407C	1219	(48)	415	(915)



Buckets

	Model	Width Range		Capacity Range	
		mm	(in)	m³	(yd³)
General Purpose	All	1854-2445	(73-96)	0.76-1.3	(1.0-1.75)
Grapple	TH255/TH406C/TH407C	1854-2330	(73-92)	0.76-.85	(1.0-1.11)
Light Material	TH255/TH406C/TH407C	1445-2500	(57-98)	1.3-3.0	(1.7-3.9)
Material Handling	All, except TH255	2418	(95)	1.5	(1.95)
Multi Purpose	All, except TH514C	1829-2418	(72-95)	0.76-1.0	(1.0-1.3)



Carriages

	Model	Width	
		mm	(in)
Carriages – standard, wide, rotating, side-shift, side tilt	All	1220-1829	(48-72)
Carriages – swing	All, except TH255/TH514C	1829	(72)



Forks

	Model	Tine Length	
		mm	(in)
Block (Cubing)	All	1220	(48)
Pallet	All	1070/1219/1524	(42/48/60)
Lumber	All	1524/1829	(60/72)
Manure Fork and Grapple	TH406C/TH407C	2290	(90)



Fork Mounted Work Platform

	Model	Width		Capacity	
		mm	(in)	kg	(lb)
Work Platform	Work Platform	TL642C/TL943C/TL1055C/TL1255C	1219 (48)	454	(1000)



Lifting Hooks

	Model	Rated Load Capacity Range	
		kg	(lb)
Fork Mounted	All	2500-5443	(5500-12000)
IT Coupler	All, except TH255	2948-4536	(6500-10000)



Material Handling Arms

	Model	Extension	
		mm	(in)
Material Handling Arm	All, except TH406C & TH407C	2135/4162	84/164




Truss Booms

	Model	Length		Rated Capacity	
		mm	(in)	kg	(lb)
Truss Boom	All, except TH255	4000	(157.5)	500	(1102)



Winch – Boom Mounted

	Model	Line Length		Capacity	
		m	(ft)	kg	(lb)
Winch	TL642C-TL1255C	23	(75)	1360	(3000)

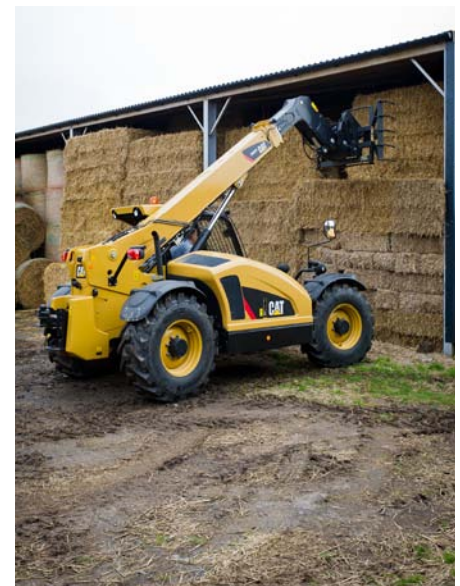

BEYOND YOUR PURCHASE...

You can be assured of a common approach to parts availability and quality of service, regardless of where the job takes you and your equipment.

Wheel Dozers

814F2 824H 834H 844H 854K



Blades	Model	Width		Capacity	
		mm	(in)	m ³	(yd ³)
Coal U-	814F2	4318	(170)	10.7	(14.0)
	824H	4801	(189)	16.1	(21.0)
	834H	5766	(227)	22.2	(29.0)
	844H	5846	(230)	30.7	(40.2)
	854K	7200	(284)	44.7	(58.2)
Semi U-	834H	4699	(185)	10.2	(13.3)
	844H	5418	(213)	16.1	(21.1)
	854K	6321	(249)	25.4	(33.1)
Woodchip U-	824H	4775	(188)	23.7	(31.0)
	834H	5766	(227)	30.6	(40.0)



Scoops	Model	Width		Doze Capacity	
		mm	(in)	m ³	(yd ³)
Coal	824H	4039	(159)	26.8	(35)
	834H	4877	(192)	45.9	(60)
Woodchip	824H	4089	(161)	41.3	(54)
	834H	4877	(192)	53.5	(70)



Landfill Compactors

816F2 826H 836H



Blades	Model	Width		Capacity	
		mm	(in)	m ³	(yd ³)
Landfill	816F2	3810	(150)	12.2	(16.0)
	826H	4369	(172)	16.8	(22.0)
	836H	5182	(204)	25.7	(33.6)
Semi U-	816F2	3810	(150)	9.2	(12.0)
	826H	4521	(178)	16.2	(21.2)
	836H	5313	(209)	22.4	(29.3)
Straight	816F2	3658	(144)	10.7	(14.0)
	826H	4369	(172)	13.0	(17.0)
	836H	5182	(204)	19.0	(25.9)



BEYOND YOUR PURCHASE...

With more dealer locations around the globe, you can be sure you or your operator is never very far from Cat parts, service and sales expertise.



Track Type Tractors

D3K2 D4K2 D5K2 D6K2 D6N D6T D7E D8T D9T D10T D11T



Blades

	Model	Width		Capacity	
		mm	(in)	m ³	(yd ³)
Coal U-	D6T-D11T	4267-8179	(168-322)	9.6-74.9	(12.6-98.0)
Cushion Dozer	D9T/D10T	3048/3505	(120/138)	N/A	
Landfill U-	D8T/D9T	2436/5512	(214/217)	23.7/38.2	(31.0/50.0)
Reclamation U-	D10T/D11T	6198/7290	(224/287)	30.6/53.5	(40.0/ 70.0)
Semi U-	D6T	4267	(168)	6.9	(9.0)
Woodchip U-	D6T/D10T	4267-6731	(168-265)	15.3-72.6	(20.0-95.0)



Rakes

	Model	Raking Width		Teeth	Tooth Spacing	
		mm	(in)		mm	(in)
Blade	D6N/D6T	2362-3505	(93-138)	8/11	279-315	(11.0-12.4)



Winches

	Model	Weight		Speed
		kg	(lb)	
PA40	D3K2-D5K2	610	(1345)	Variable
PA50	D6K	907	(2000)	Variable



Motor Graders

120M2 12M2 140M2 160M2 14M 16M 24M



Blades

	Model	Width		Height	
		mm	(in)	mm	(in)
Angle	120M2-14M	3835	(151)	978	(39)
Straight	120M2-16M	2794-3327	(110-131)	1321-1448	(52-57)



Parallel Lift Groups

	Model	Weight	
		kg	(lb)
Parallel Lift Groups	120M2-16M	680-1220	(1500-2690)



Scarifiers

	Model	Working Width		Teeth
		mm	(in)	
Front V-Type	120M2-14M	1260	(50)	5/11
Mid-Mount Straight	120M2-160M2			17
Mid-Mount V-Type	120M2-160M2			11




Plows

	Model	Cutting Width		Height	
		mm	(in)	mm	(in)
One-Way	120M2-14M	3048/3505	(120/138)	1702/1676	(67/66)
Reversible	120M2-14M	3658-4572	(144-180)	1219	(48)
V-	120M2-14M	2642-3200	(104-126)	2007-2286	(79-90)



Snow Wings

	Model	Length		Height	
		mm	(in)	mm	(in)
Snow Wings	120M2-14M	3658/4267	(144/168)	965	(38)

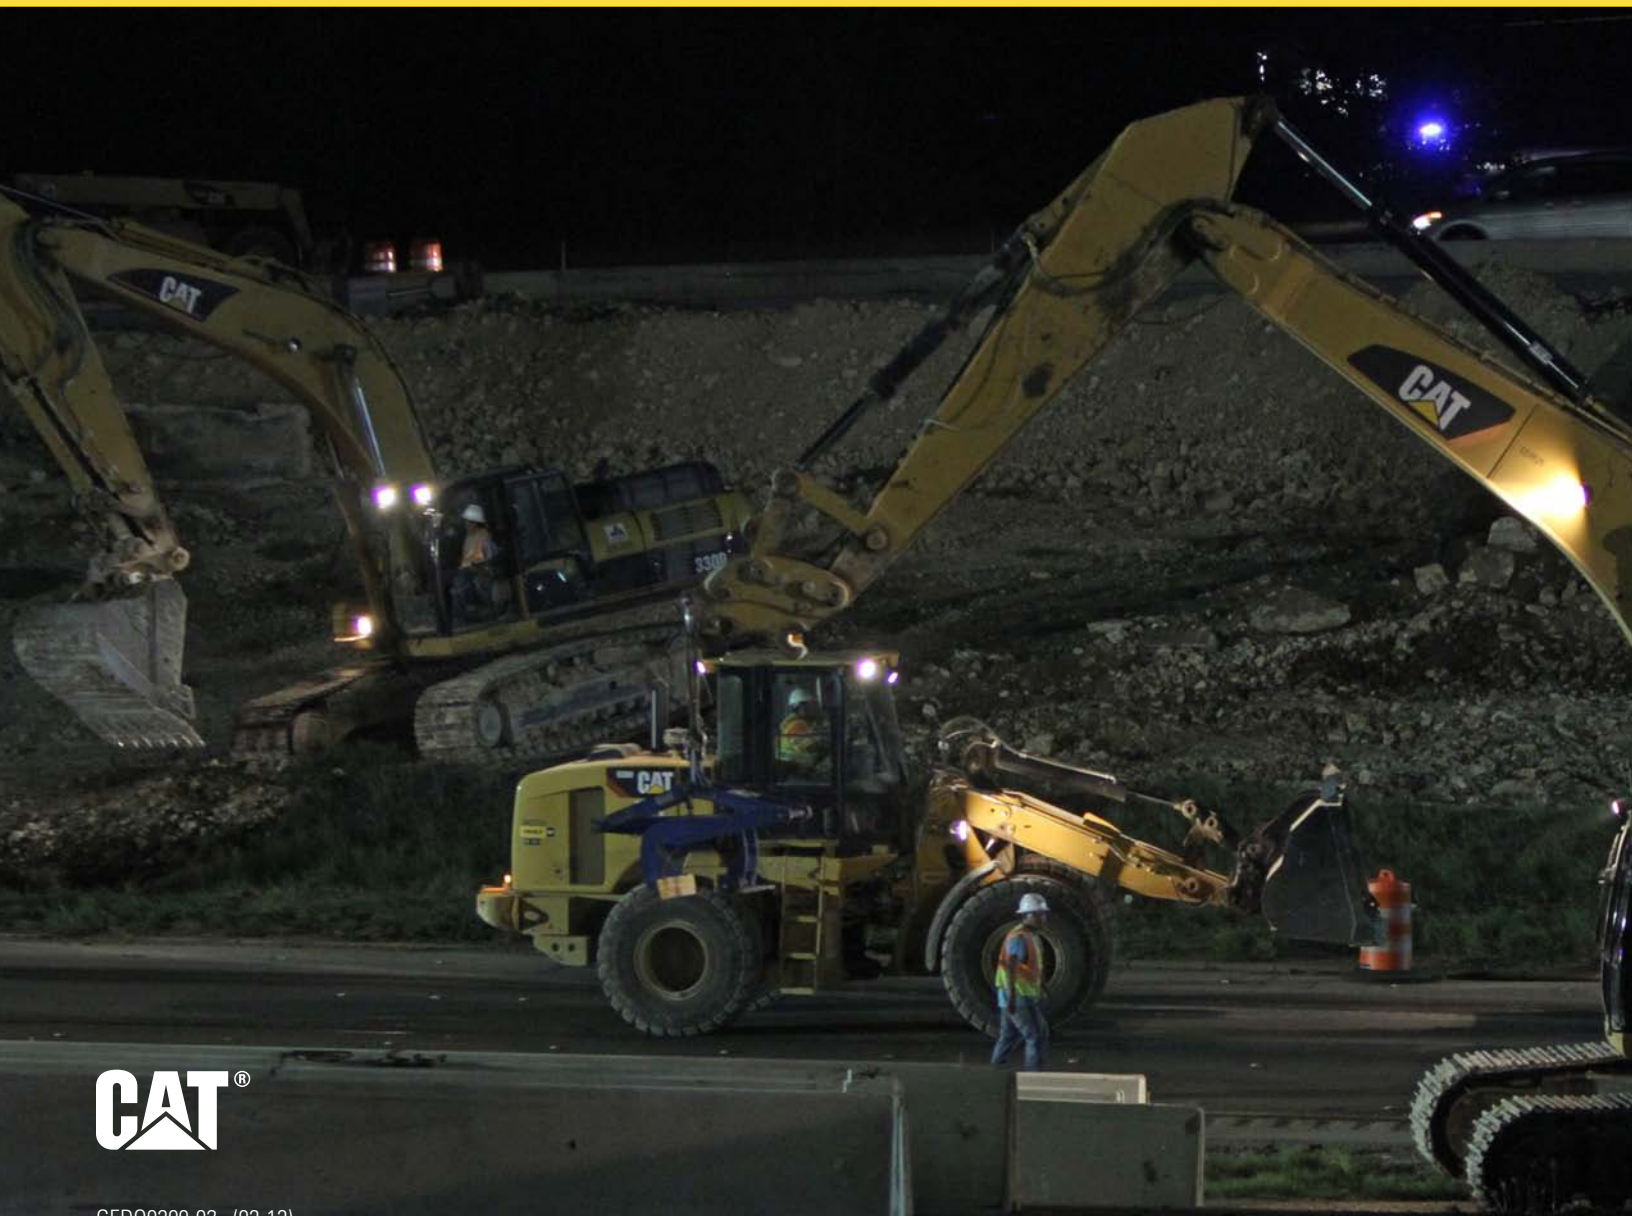

GED00300-02 (03-13)

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

©2013 Caterpillar
All Rights Reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow," and the POWER EDGE trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.